




SCAN CODE TO
WATCH VIDEO

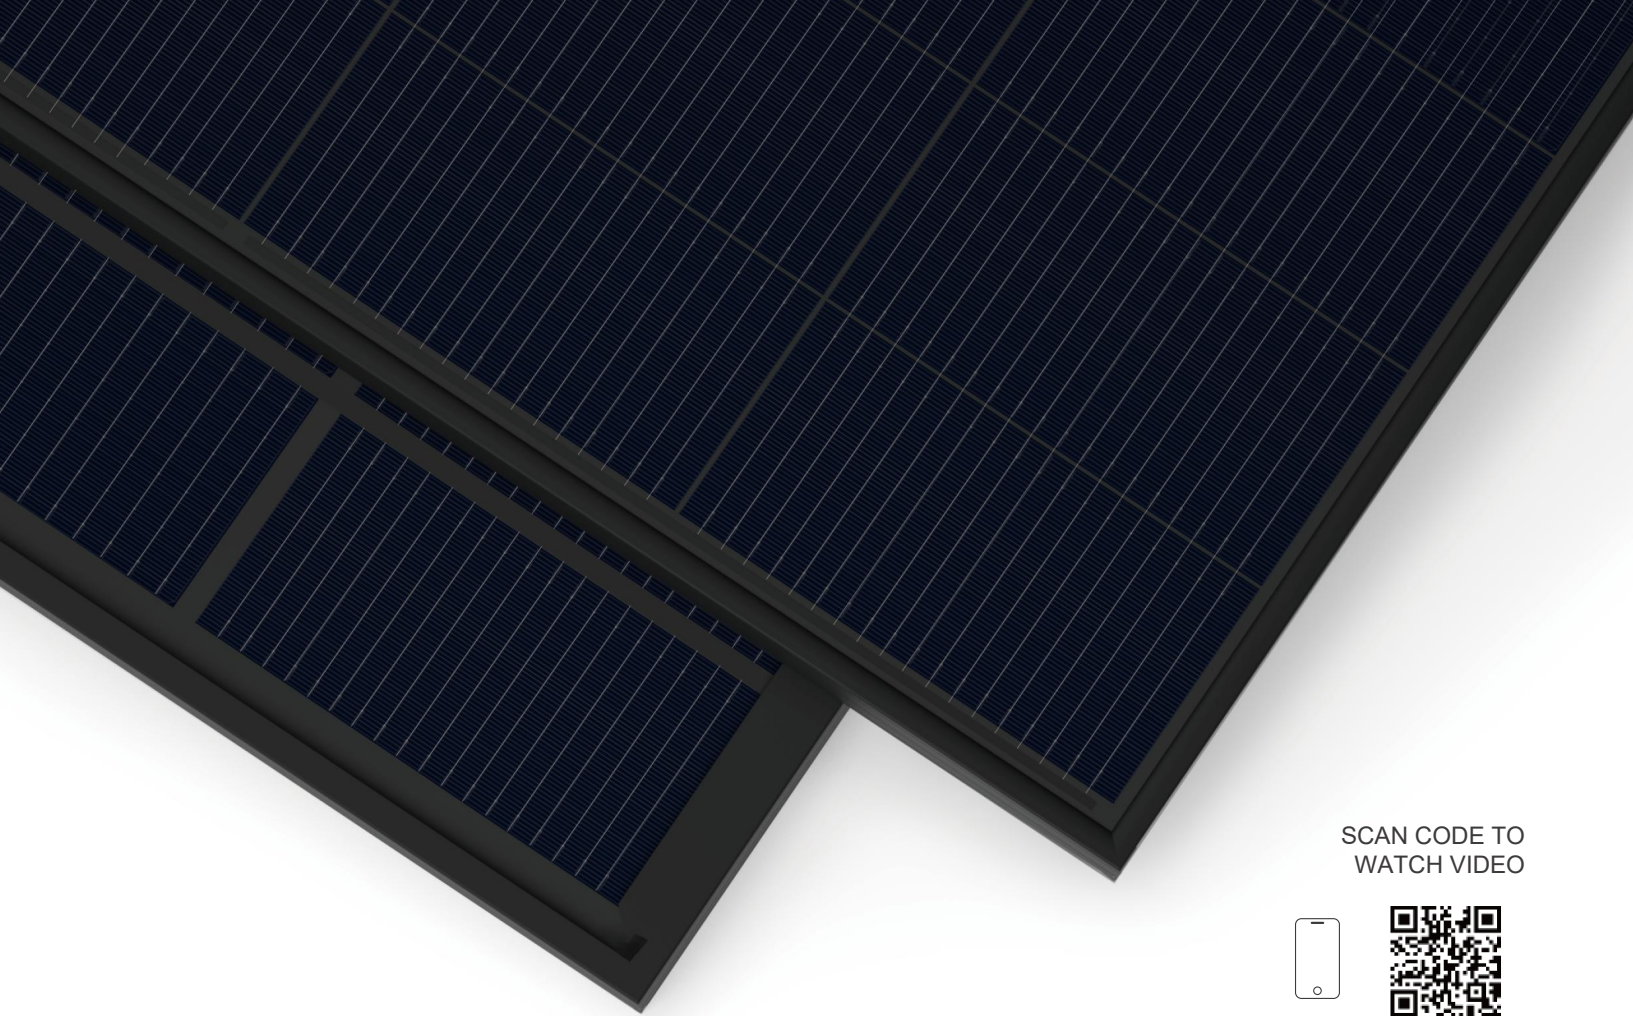


Learn more about the
production of 182mm
Mono PV Module

SKT480~500M12-108D3 480~500 Watt

182mm 120Cells All Black Double Glass Bifacial
HJT Mono Half Cell PV Module Series

Sunket HJT Linear Warranty

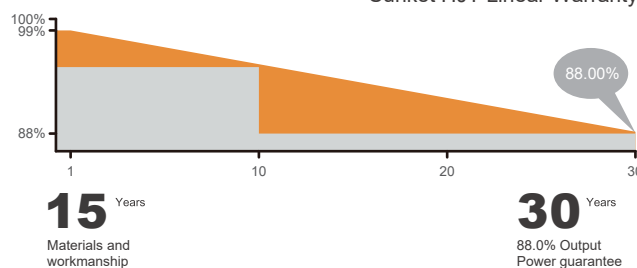

SMBB HJT
Half Cut Cell



Excellent Low-light
Performance



100% Inspection
Guarantee Reliability



Anti PID





5400Pa
Strengthened
Mechanical Load



Advanced Bifacial
Efficiency



 **SUNKET[®] - Solar**

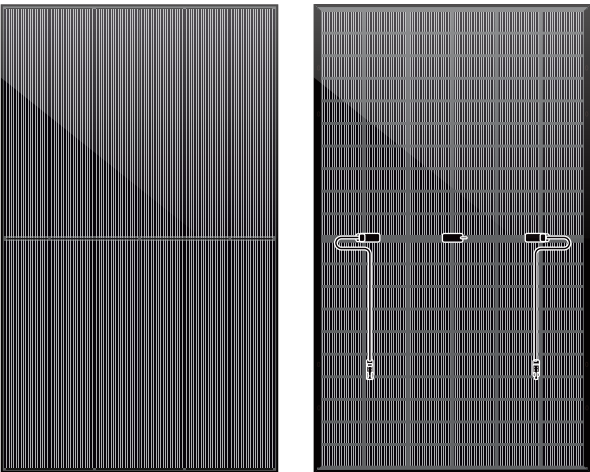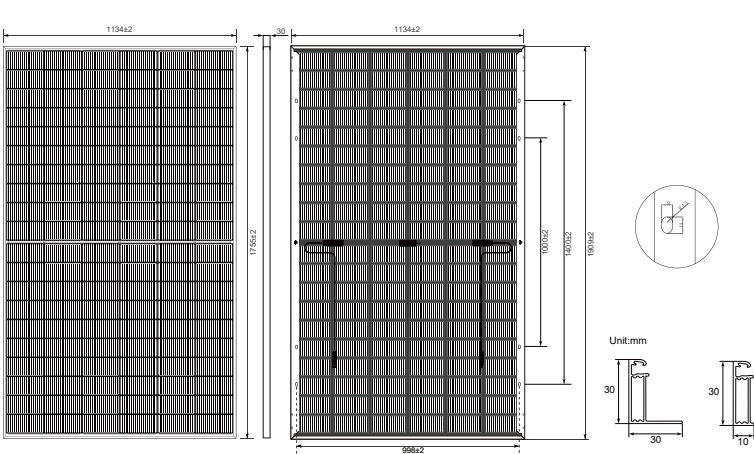

All Dimensions in mm
The above drawing is a graphical representation of the product.

Electrical Characteristics (STC/BSTC)

Module Type	SKT480M12-108D3		SKT485M12-108D3		SKT490M12-108D3		SKT495M12-108D3		SKT500M12-108D3	
Test Conditions	STC	BSTC	STC	BSTC	STC	BSTC	STC	BSTC	STC	BSTC
Maximum Power- Pmax(W)	480	532	485	536	490	541	495	546	500	550
Open Circuit Voltage - Voc(V)	44.82	44.82	45.02	45.02	45.22	45.22	45.41	45.41	45.60	45.60
Short- Circuit Current - Isc(A)	13.34	14.74	13.39	14.78	13.44	14.82	13.49	14.86	13.54	14.90
Voltage at Pmax -Vmp(V)	37.38	37.38	37.60	37.60	37.82	37.82	38.03	38.03	38.24	38.24
Current at Pmax - Imp(A)	12.86	14.23	12.92	14.27	12.98	14.31	13.03	14.35	13.08	14.39
Module Efficiency -ηm(%)	22.11	/	22.35	/	22.58	/	22.81	/	23.04	/
Power Tolerance(W)	(0, +4.99W)									
Maximum System Voltage(V)	1500Vdc (IEC / UL)									
Maximum Series Fuse Rating (A)	30A									

*STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5
*BSTC : Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, Ambient Temperature 25°C.
*Measurement tolerance: ±3% *Power binning up to: +3%

Mechanical Specifications

External Dimensions	1909x1134x30mm
Weight	24.8kg
Solar Cells	HJT 182mm (2x60pcs)
Glass	AR Coated 1.6+1.6 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm², 1200mm (+), 1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.260%/°C
Voc Temperature Coefficient	-0.240%/°C
Isc Temperature Coefficient	+0.040%/°C
Operating Temperature Range	-40~+85°C
Nominal Operating Cell Temperature(BSTC)	44±2°C

Packing Configuration

Pallet Dimensions	1940x1140x1254mm		
Ways of Transport	40'HQ	13.5m Flatbed Truck	17.5m Flatbed Truck
Pieces per Pallet	37 Pcs	36 Pcs	36 Pcs
Pallets per Container	24 Pallets	21 Pallets	32 Pallets
Pieces per Container	888 Pcs	756 Pcs	1152 Pcs

Current-Voltage & Power-Voltage Curves (SKT500M12-108D3)

