

340~380 Watt
SKT 340~380G12

340~380瓦单晶光伏组件
210mm 72Cells PV Module

Electrical Characteristics

电气特性

组件型号	Module Type	SKT 340~380G12					
		STC					
额定功率	Maximum Power- Pmax(W)	340	350	360	370	380	
开路电压	Open Circuit Voltage - Voc(V)	23.94	24.05	24.37	25.24	25.52	
短路电流	Short- Circuit Current - Isc(A)	17.58	17.94	18.19	17.74	18.07	
工作电压	Voltage at Pmax -Vmp(V)	20.48	20.59	20.77	21.60	22.00	
工作电流	Current at Pmax - Imp(A)	16.60	17.00	17.33	17.13	17.28	
组件效率	Module Efficiency - η m(%)	19.67	20.25	20.83	21.41	21.99	
功率公差	Power Tolerance(W)	0, +4.99W					
最高系统电压	Maximum System Voltage(V)	1000Vdc (IEC / UL)					
最大额定熔断电流	Maximum Series Fuse Rating (A)	30A					

标准测试条件STC: 光照强度Irradiance 1000W/m², 组件温度Cell Temperature 25°C, 大气质量AM 1.5

Mechanical Specifications



结构特性

组件尺寸	External Dimensions	1975*875*30mm
重量	Weight	14.6kg
电池	Solar Cells	Mono crystalline 210X105mm (4X18pcs)
玻璃	Front Glass	3.2 mm tempered glass
边框	Frame	Aluminum
接线盒	Junction Box	IP67
输出导线	Output Cables	90cm, length can be customized
连接器	Connector	MC4 Compatible
机械载荷	Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

温度特性

最高功率温度系数	Pmax Temperature Coefficient	-0.290%/°C
开路电压温度系数	Voc Temperature Coefficient	-0.250%/°C
短路电流温度系数	Isc Temperature Coefficient	+0.045%/°C
光伏组件工作温度	Operating Temperature	-40~+85°C
额定工作电池片温度	Nominal Operating Cell Temperature(NOCT)	45±2°C

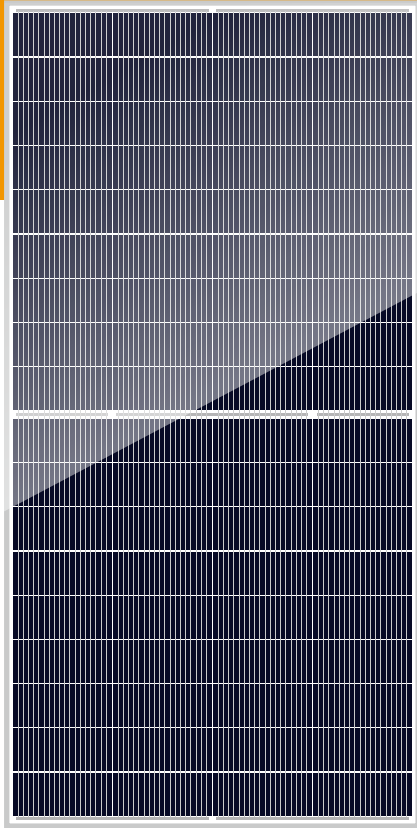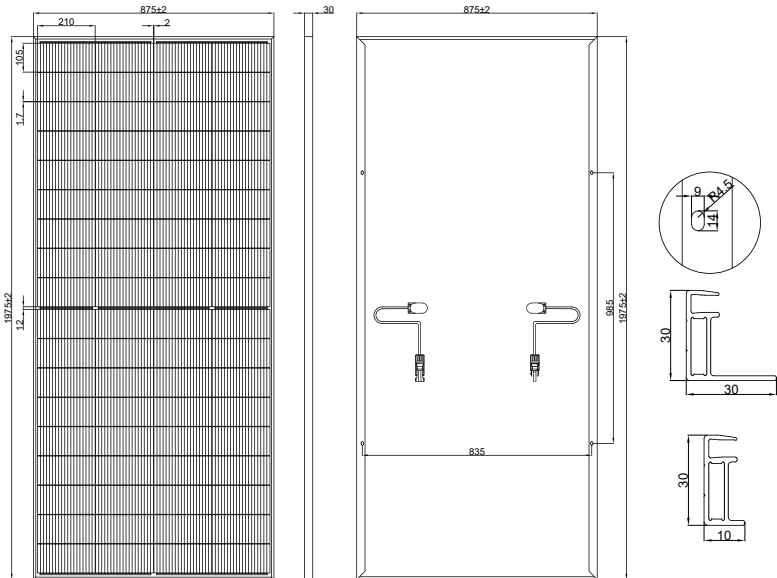

Packing Configuration

包装方式

组件型号	Module Type	SKT340~380G12
组件尺寸	Module Dimensions	1975*875*30mm
托盘尺寸	Pallet Dimensions	2005*1120*110mm
每托重量	Pallet Weight	555.6kg
每托数量	Pieces/Pallet	36pcs

